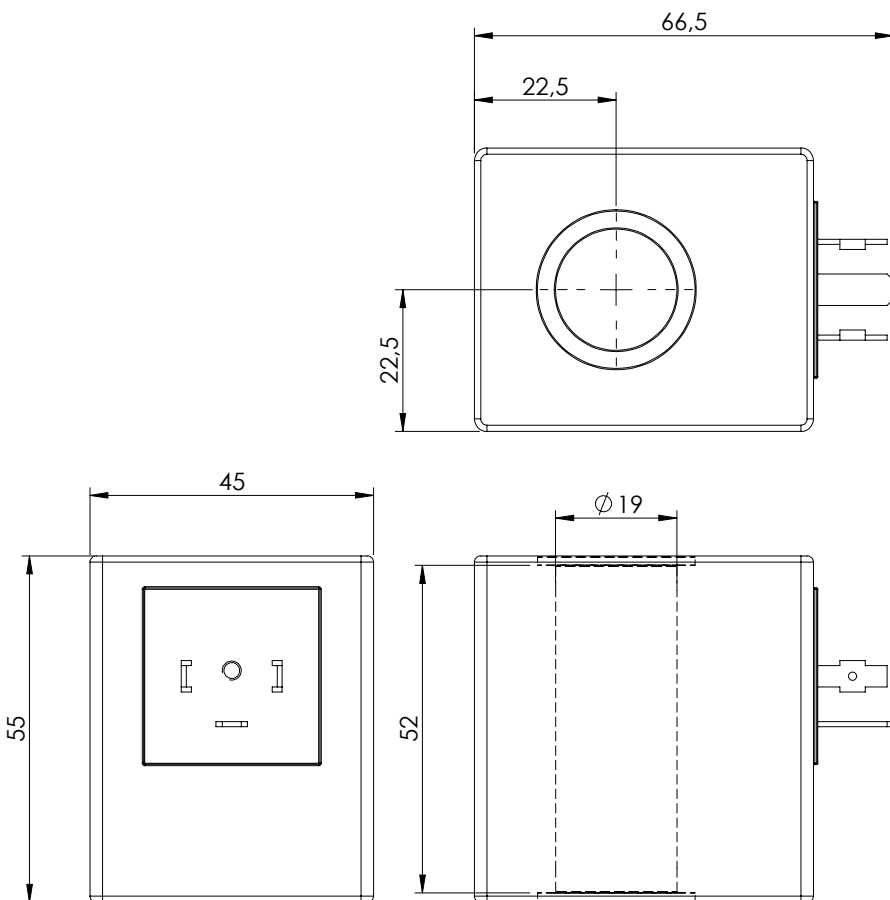



COIL															
COIL SERIES M9				DIN 43650 - ISO 4400 CLASS H											
															
				SPECIFICATIONS <table><tr><td>Heat insulation class H</td><td>180°C</td></tr><tr><td>Ambient temperature</td><td>-30 + 60°C</td></tr><tr><td>Inlet voltage</td><td>±10% tol.</td></tr><tr><td colspan="2">Insulation class IP65 with all seals properly mounted</td></tr><tr><td>Weight:</td><td>0,485 kg</td></tr></table>		Heat insulation class H	180°C	Ambient temperature	-30 + 60°C	Inlet voltage	±10% tol.	Insulation class IP65 with all seals properly mounted		Weight:	0,485 kg
Heat insulation class H	180°C														
Ambient temperature	-30 + 60°C														
Inlet voltage	±10% tol.														
Insulation class IP65 with all seals properly mounted															
Weight:	0,485 kg														
				NOTES											
ORDERING CODES															
Quick code	Description	Connection type	Voltage (V)	Resistance (Ω) ± 7%	Power (w)	Current (A)									
AB000030	Coil M9 HS 12V CLASS H	DIN 43650-ISO 4400	12 DC	4.0	36	3.0									
AB000036	Coil M9 HS 24V CLASS H	DIN 43650-ISO 4400	24 DC	16.0	36	1.50									