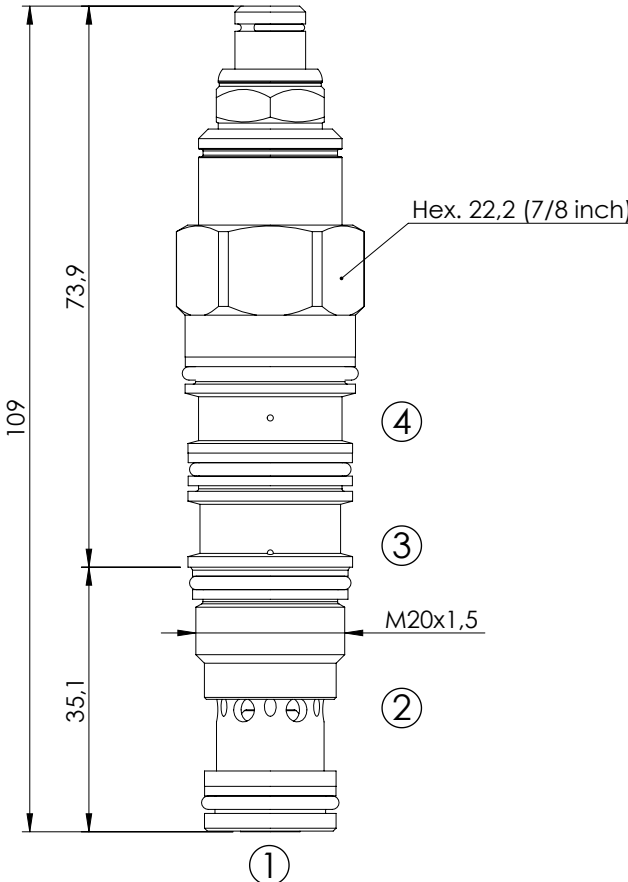

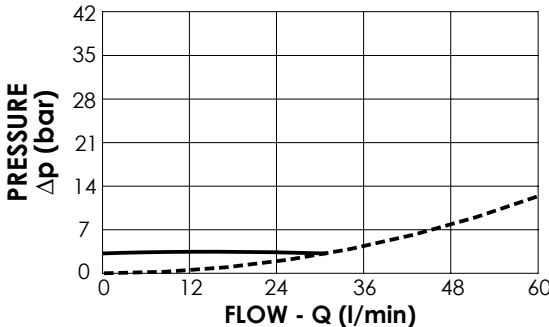


OVERCENTRE VALVE		Atlantic Fluid Tech								
CBST-060-PSRR	POPPET TYPE VENTED									
		 								
		SPECIFICATIONS <table><tr><td>Max. operating pressure:</td><td>420 bar</td></tr><tr><td>Rated flow:</td><td>60 l/min</td></tr><tr><td>Cavity:</td><td>VP000162 (SUN T-21A)</td></tr><tr><td>Weight:</td><td>0,19 kg</td></tr></table>	Max. operating pressure:	420 bar	Rated flow:	60 l/min	Cavity:	VP000162 (SUN T-21A)	Weight:	0,19 kg
Max. operating pressure:	420 bar									
Rated flow:	60 l/min									
Cavity:	VP000162 (SUN T-21A)									
Weight:	0,19 kg									
		NOTES <table><tr><td>Setting:</td><td>at least 1.3 times the load induced pressure</td></tr><tr><td>Installation torque:</td><td>40 - 50 Nm</td></tr><tr><td>Turn anticlockwise to increase the setting</td><td></td></tr><tr><td>Seal kit:</td><td>RC700162</td></tr></table>	Setting:	at least 1.3 times the load induced pressure	Installation torque:	40 - 50 Nm	Turn anticlockwise to increase the setting		Seal kit:	RC700162
Setting:	at least 1.3 times the load induced pressure									
Installation torque:	40 - 50 Nm									
Turn anticlockwise to increase the setting										
Seal kit:	RC700162									
ORDERING CODES										
Quick code	Description	Pilot ratio	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)					
CB000079	CBST-060-PSRR-10-162-T280-N420	10:1	280	140 - 420	-					