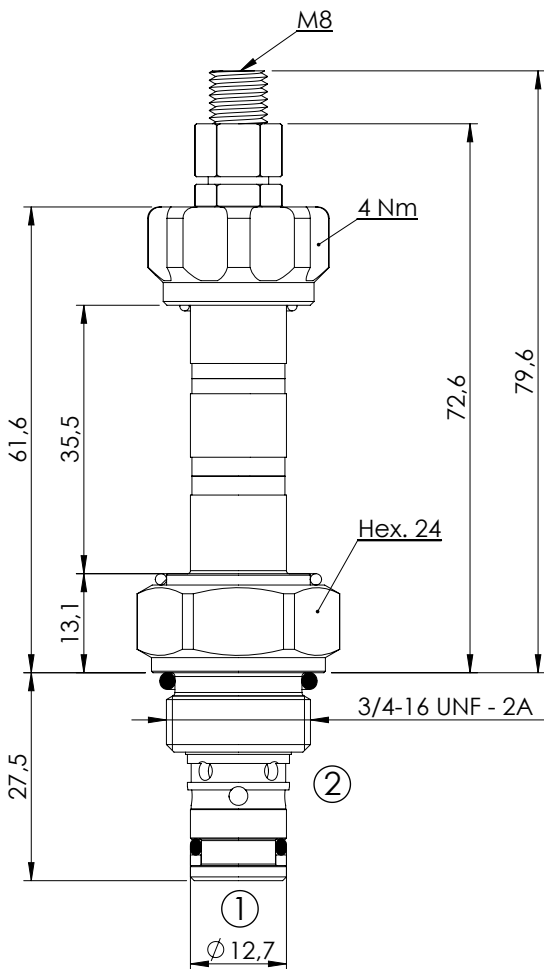


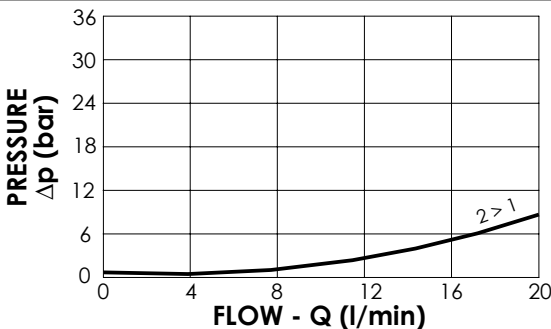



SOLENOID OPERATED CARTRIDGE																	
CEBP-020-NCFF		PILOT OPERATED POPPET TYPE															
		 															
		SPECIFICATIONS <table><tr><td>Max. operating pressure:</td><td>250 bar</td></tr><tr><td>Rated flow:</td><td>20 l/min</td></tr><tr><td>Cavity:</td><td>SAE-08-2N</td></tr><tr><td>Weight:</td><td>0,13 kg</td></tr><tr><td>Min. voltage required:</td><td>90% of nominal</td></tr><tr><td>Coil type:</td><td>M7</td></tr><tr><td>Seal kit:</td><td>RA700081</td></tr></table>		Max. operating pressure:	250 bar	Rated flow:	20 l/min	Cavity:	SAE-08-2N	Weight:	0,13 kg	Min. voltage required:	90% of nominal	Coil type:	M7	Seal kit:	RA700081
Max. operating pressure:	250 bar																
Rated flow:	20 l/min																
Cavity:	SAE-08-2N																
Weight:	0,13 kg																
Min. voltage required:	90% of nominal																
Coil type:	M7																
Seal kit:	RA700081																
		NOTES <table><tr><td>Installation torque:</td><td>45 - 50 Nm</td></tr></table>		Installation torque:	45 - 50 Nm												
Installation torque:	45 - 50 Nm																
		OPTIONS  Cable operated															
ORDERING CODES																	
Quick code	Description	Options															
CE000064	CEBP-020-NCFF-01-S08-N250	Cable operated															