




SOLENOID OPERATED CARTRIDGE

CEBP-040-NAFN

**PILOT OPERATED
POPPET TYPE**

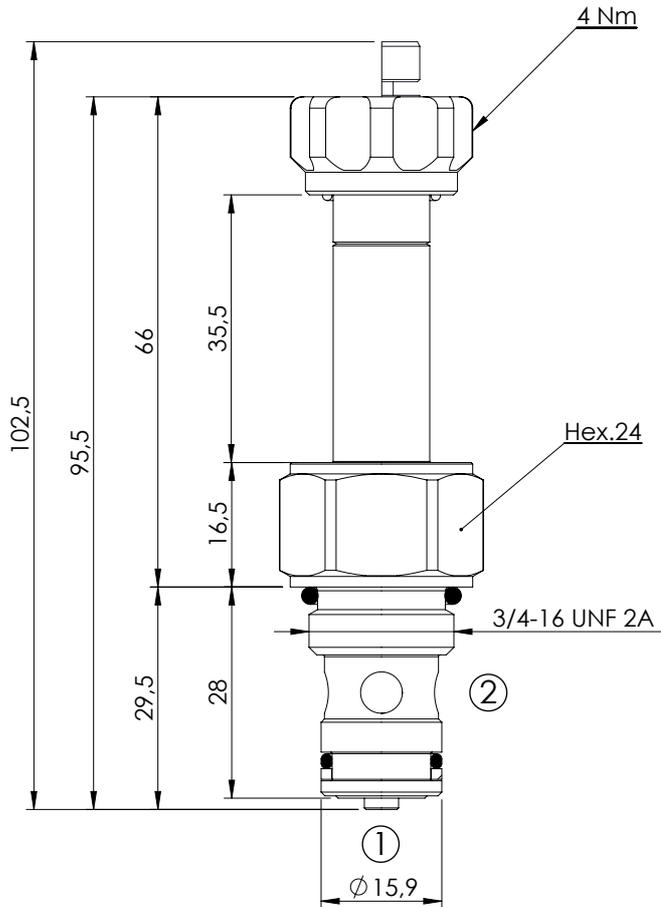


SPECIFICATIONS


Max. operating pressure:	350 bar
Rated flow:	40 l/min
Cavity:	VP000064
Weight:	0,1 kg
Min. voltage required:	90% of nominal
Coil type:	

NOTES


Installation torque: 45 - 50 Nm

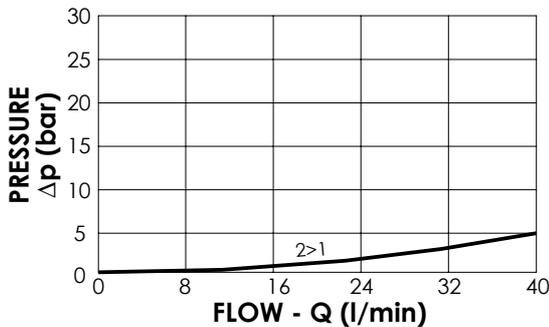

OPTIONS



Standard



Push style
override

ORDERING CODES

Quick code	Description	Options	
CE000141	CEBP-040-NAFN-12-064-N350	Standard	
CE000089	CEBP-040-NAFE-12-064-N350	Push style override	