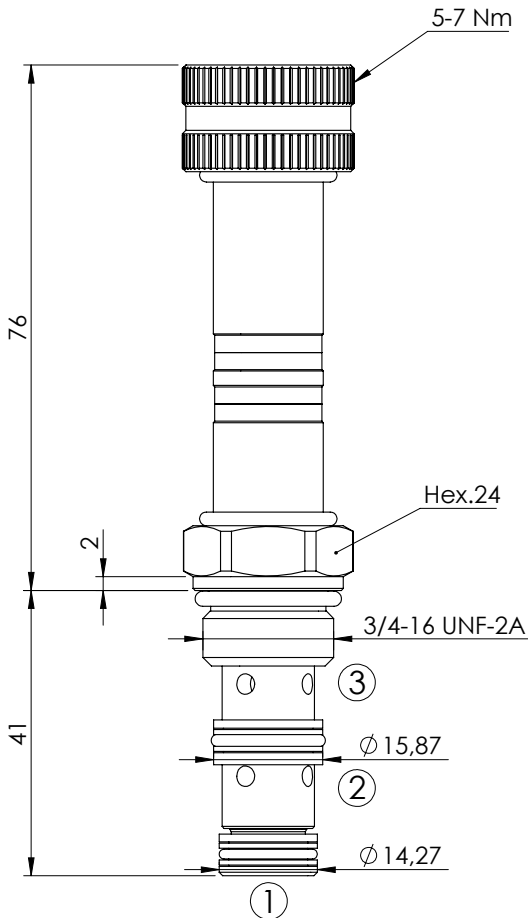


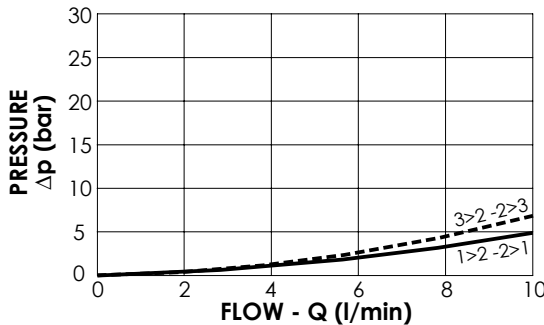




SOLENOID OPERATED CARTRIDGE		 ATLANTIC Fluid Tech															
CECD-010-NAFN		DIRECT ACTING POPPET TYPE															
		 															
		SPECIFICATIONS <table><tr><td>Max. operating pressure:</td><td>210 bar</td></tr><tr><td>Rated flow:</td><td>10 l/min</td></tr><tr><td>Cavity:</td><td>SAE-08-3N</td></tr><tr><td>Weight:</td><td>0,19 kg</td></tr><tr><td>Min. voltage required:</td><td>90% of nominal</td></tr><tr><td>Coil type:</td><td>T3</td></tr><tr><td>Leakage:</td><td>0.15 cm³/min</td></tr></table>		Max. operating pressure:	210 bar	Rated flow:	10 l/min	Cavity:	SAE-08-3N	Weight:	0,19 kg	Min. voltage required:	90% of nominal	Coil type:	T3	Leakage:	0.15 cm ³ /min
Max. operating pressure:	210 bar																
Rated flow:	10 l/min																
Cavity:	SAE-08-3N																
Weight:	0,19 kg																
Min. voltage required:	90% of nominal																
Coil type:	T3																
Leakage:	0.15 cm ³ /min																
		NOTES <table><tr><td>Installation torque:</td><td>39 - 51 Nm</td></tr></table>		Installation torque:	39 - 51 Nm												
Installation torque:	39 - 51 Nm																
		OPTIONS  Non-adjustable  Push style Manual Override															
ORDERING CODES																	
Quick code	Description	Options															
CE000156	CECD-010-NAFN-66-S08-N210	Non-adjustable															
CE000925	CECD-010-NAFP-66-S08-N210	Push style Manual Override															