
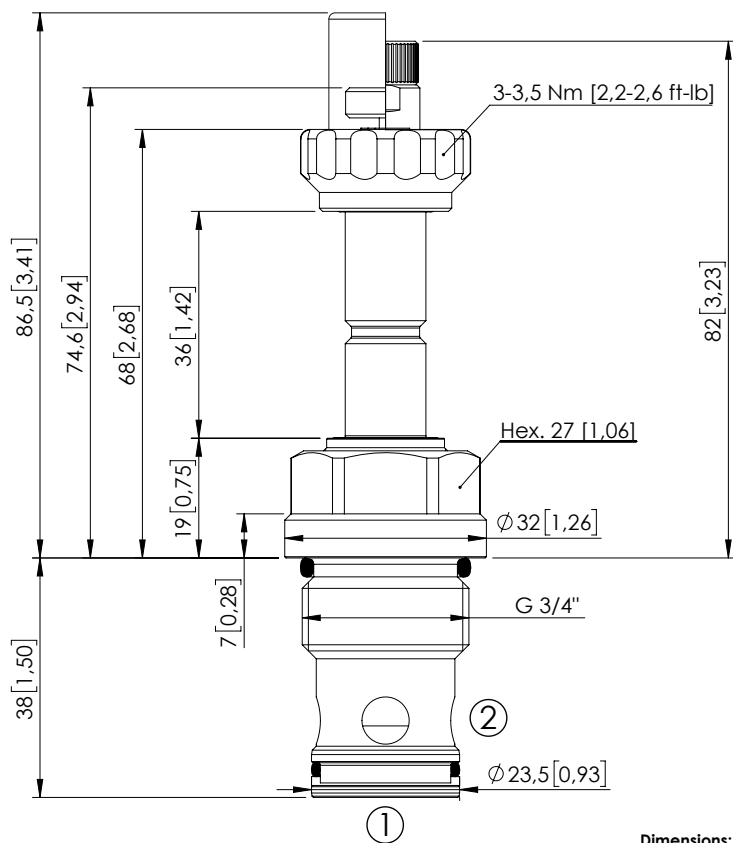


SOLENOID OPERATED CARTRIDGE

CEBN-110-NAFN

PILOT OPERATED
POPPET TYPE

Dimensions: mm [inches]



SPECIFICATIONS


Max. operating pressure:	350/500 bar (5000/7200 psi)
Rated flow:	110 l/min (29 gpm)
Cavity:	VP000057
Weight:	0,25 kg (0,55 lbs)
Min. voltage required:	90% of nominal
Coil type:	M7 or M3 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RC900057
Installation torque:	110 - 130 Nm (81 - 96 ft-lb)
MTF _d :	150 years

NOTES


OPTIONS

SEALING CAP

Standard

Push style
overrideKnob style
overrideOrdering code:
AT000113

CURVES

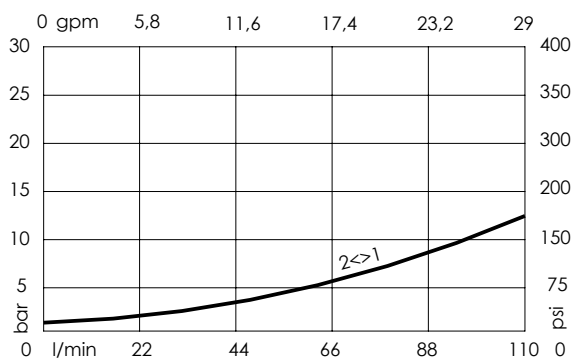

ORDERING CODES

Quick code	Description	Options	Max operating pressure	
CE000306	CEBN-110-NAFN-06-057-N350	Standard	350 bar (5000 psi)	
CE000307	CEBN-110-NAFP-06-057-N350	Push style override	350 bar (5000 psi)	
CE000308	CEBN-110-NAFK-06-057-N350	Knob style override	350 bar (5000 psi)	
CE000606	CEBN-110-NAFN-06-057-N500	Standard	500 bar (7200 psi)	
CE000607	CEBN-110-NAFP-06-057-N500	Push style override	500 bar (7200 psi)	
CE000608	CEBN-110-NAFK-06-057-N500	Knob style override	500 bar (7200 psi)	

Revision F1