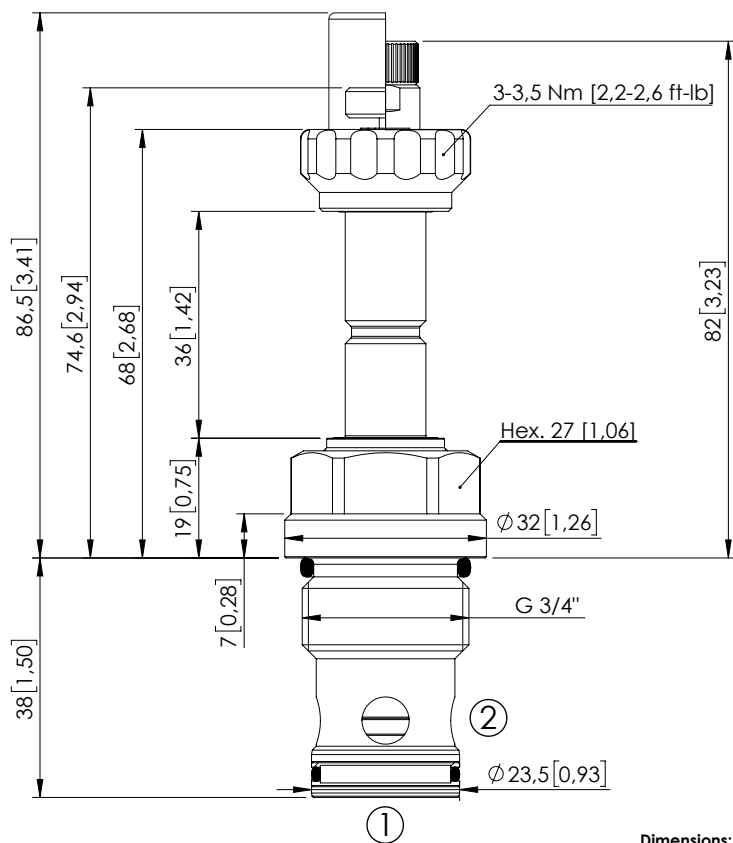


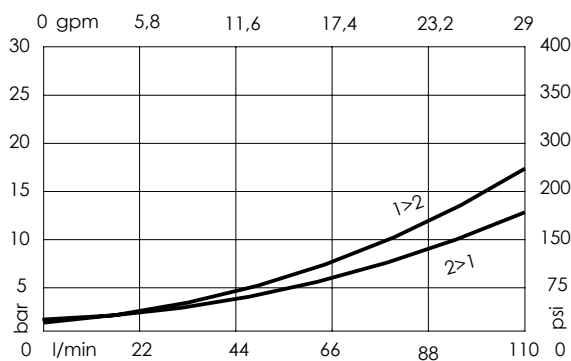


SOLENOID OPERATED CARTRIDGE

CEBN-110-NAFNPILOT OPERATED
POPPET TYPE

Dimensions: mm [inches]

**SPECIFICATIONS****Max. operating pressure:** 350/500 bar (5000/7200 psi)**Rated flow:** 110 l/min (29 gpm)**Cavity:** VP000057**Weight:** 0,25 kg (0.55 lbs)**Min. voltage required:** 90% of nominal**Coil type:** M7 or M3 type**Ambient temperature:** -20/+50 °C (-4/+122 °F)**Contamination class to ISO 4406:** See technical spec.**Seal kit:** RD900057**Installation torque:** 110 - 130 Nm (81 - 96 ft-lb)**MTF_d:** 150 years**NOTES****OPTIONS****SEALING CAP****Standard****Push style
override****Knob style
override****Ordering code:**
AT000113**CURVES****ORDERING CODES**

Quick code	Description	Options	Max operating pressure	
CE000312	CEBN-110-NAFN-32-057-N350	Standard	350 bar (5000 psi)	
CE000313	CEBN-110-NAFP-32-057-N350	Push style override	350 bar (5000 psi)	
CE000314	CEBN-110-NAFK-32-057-N350	Knob style override	350 bar (5000 psi)	
CE000612	CEBN-110-NAFN-32-057-N500	Standard	500 bar (7200 psi)	
CE000613	CEBN-110-NAFP-32-057-N500	Push style override	500 bar (7200 psi)	
CE000614	CEBN-110-NAFK-32-057-N500	Knob style override	500 bar (7200 psi)	