
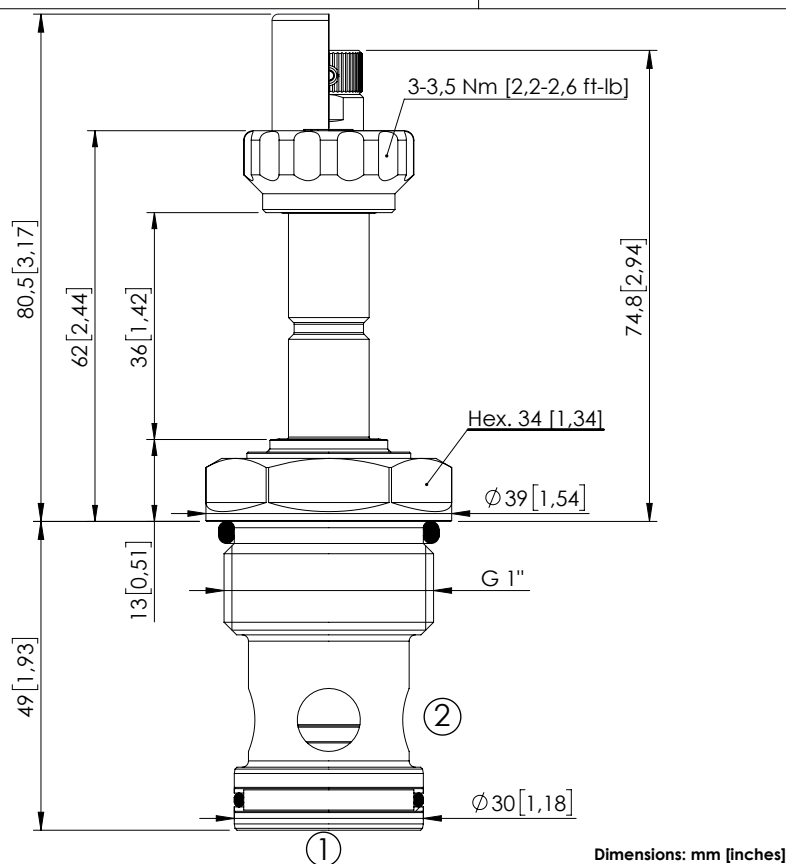




SOLENOID OPERATED CARTRIDGE

CEBN-210-NCFNPILOT OPERATED
POPPET TYPE**SPECIFICATIONS**

Max. operating pressure:	350/500 bar (5000/7200 psi)
Rated flow:	210 l/min (55 gpm)
Cavity:	VP000013
Weight:	0.35 kg (0.77 lbs)
Min. voltage required:	90% of nominal
Coil type:	M7 or M3 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RD900013
Installation torque:	135 - 150 Nm (100 - 111 ft-lb)
MTTFd:	150 years

NOTES**OPTIONS****SEALING CAP**

Standard

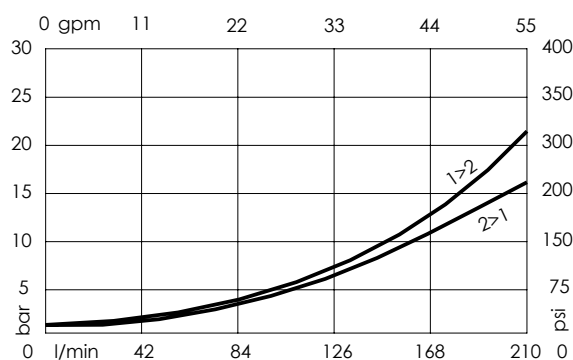Knob style
overrideOrdering code:
AT000113**CURVES****ORDERING CODES**

Quick code	Description	Options	Max operating pressure	
CE000366	CEBN-210-NCFN-31-013-N350	Standard	350 bar (5000 psi)	
CE000368	CEBN-210-NCFK-31-013-N350	Knob style override	350 bar (5000 psi)	
CE000666	CEBN-210-NCFN-31-013-N500	Standard	500 bar (7200 psi)	
CE000668	CEBN-210-NCFK-31-013-N500	Knob style override	500 bar (7200 psi)	