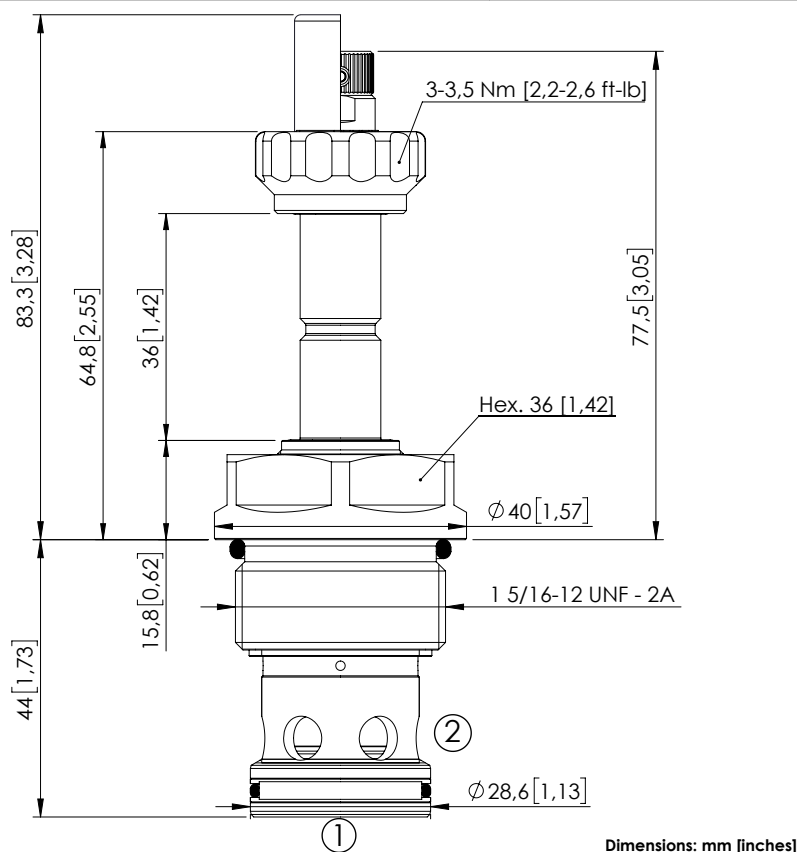



SOLENOID OPERATED CARTRIDGE

CEBN-310-NCFNPILOT OPERATED
POPPET TYPE

Dimensions: mm [inches]

**SPECIFICATIONS**

Max. operating pressure: 350/500 bar (5000/7200 psi)

Rated flow: 310 l/min (82 gpm)

Cavity: SAE-16-2N

Weight: 0,36 kg (0,79 lbs)

Min. voltage required: 90% of nominal

Coil type: M7 or M3 type

Ambient temperature: -20/+50 °C (-4/+122 °F)



Contamination class to ISO 4406: See technical spec.

Seal kit: RB900084

Installation torque: 200 - 210 Nm (148 - 155 ft-lb)

MTF_d: 150 years**NOTES****OPTIONS****SEALING CAP**

Standard

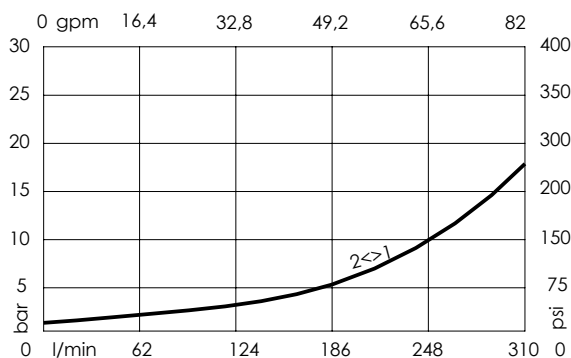Knob style
overrideOrdering code:
AT000113**CURVES****ORDERING CODES**

Quick code	Description	Options	Max operating pressure	
CE000401	CEBN-310-NCFN-31-S16-N350	Standard	350 bar (5000 psi)	
CE000403	CEBN-310-NCFK-31-S16-N350	Knob style override	350 bar (5000 psi)	
CE000701	CEBN-310-NCFN-31-S16-N500	Standard	500 bar (7200 psi)	
CE000703	CEBN-310-NCFK-31-S16-N500	Knob style override	500 bar (7200 psi)	