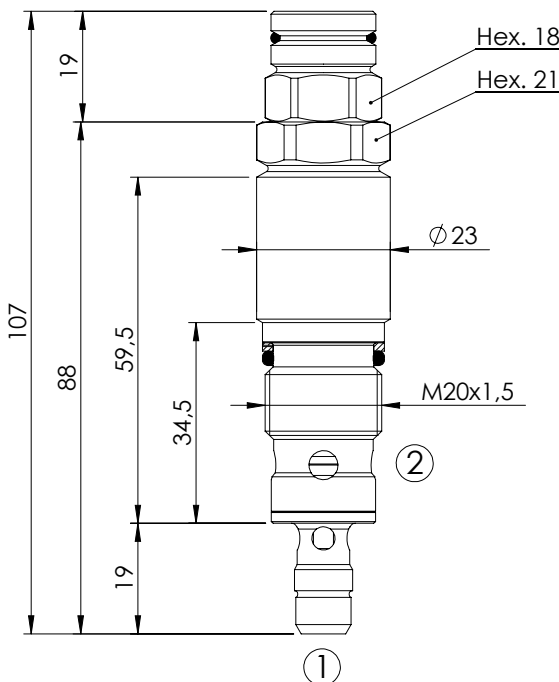

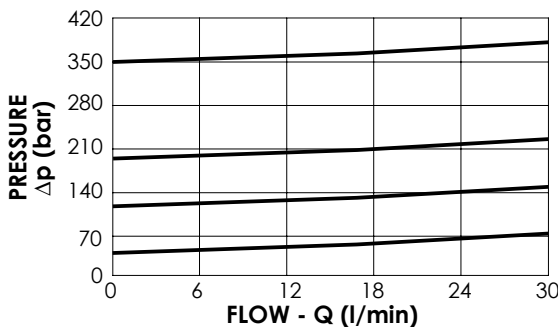


RELIEF VALVE												
CPLT-030-DHNA	DIRECT ACTING COMPENSATED STABILIZED PISTON HARDENED SEAT											
												
												
		<table><tr><th colspan="2">SPECIFICATIONS</th></tr><tr><td>Max. operating pressure:</td><td>420 bar</td></tr><tr><td>Rated flow:</td><td>30 l/min</td></tr><tr><td>Cavity:</td><td>VP000008</td></tr><tr><td>Weight:</td><td>0,2 kg</td></tr></table>	SPECIFICATIONS		Max. operating pressure:	420 bar	Rated flow:	30 l/min	Cavity:	VP000008	Weight:	0,2 kg
SPECIFICATIONS												
Max. operating pressure:	420 bar											
Rated flow:	30 l/min											
Cavity:	VP000008											
Weight:	0,2 kg											
		<table><tr><th colspan="2">NOTES</th></tr><tr><td>Installation torque:</td><td>45-50 Nm</td></tr><tr><td>Seal kit:</td><td>RC700008</td></tr></table>	NOTES		Installation torque:	45-50 Nm	Seal kit:	RC700008				
NOTES												
Installation torque:	45-50 Nm											
Seal kit:	RC700008											
ORDERING CODES												
Quick code	Description	Standard setting (bar, Q=5 l/min)	Adjustment range (bar)	Pressure increase (bar/turn)								
CP000127	CPLT-030-DHNA-HN-008-N420	350	250-420	104								
CP000095	CPLT-030-DHNA-HN-008-N350	350	100-350	91								
CP000096	CPLT-030-DHNA-HN-008-N200	200	50-210	42								
CP000097	CPLT-030-DHNA-HN-008-N100	100	30-100	20								
CP000098	CPLT-030-DHNA-HN-008-N050	50	10-50	10								