
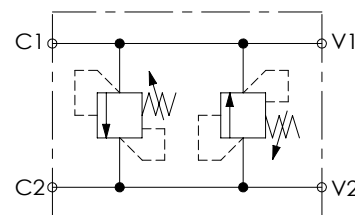

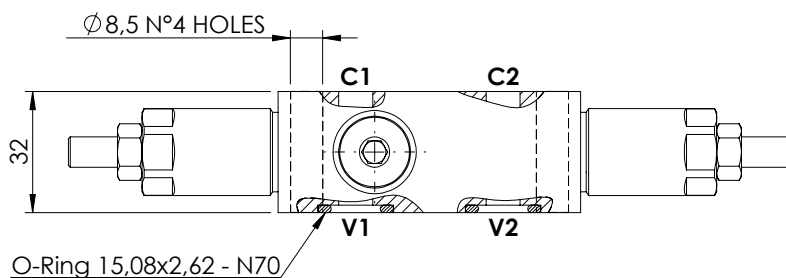


VALVES FOR MOTORS

MADN-030-TDNR

DOUBLE ANTISHOCK

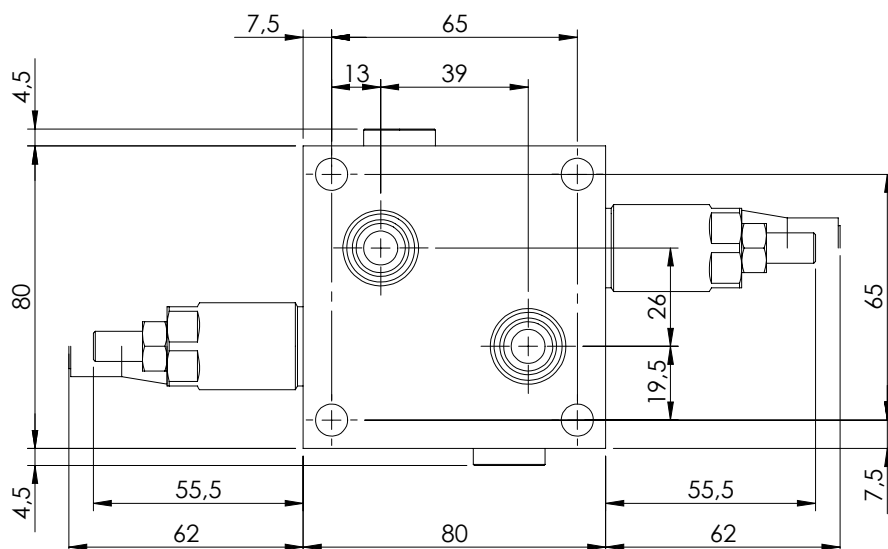

SPECIFICATIONS

Max. operating pressure: 350 bar

Rated flow: 30 l/min



Manifold: Zinc plated steel

Weight: 1,62 kg

SEALING CAP

Ordering code:

AT000020

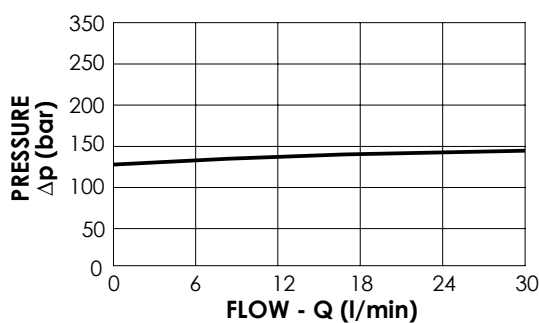

NOTES

Setting: at least 1.3 times the load induced pressure

ORDERING CODES

Quick code	Description	Main ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
MA000031	MADN-030-SDNR-HN-PTF-N200	V1,V2,C1,C2: $\phi 9$	200	50-210	42