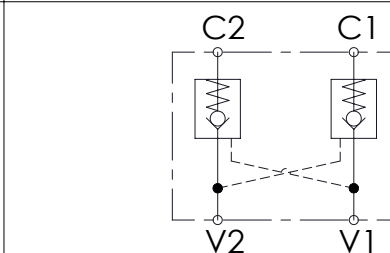
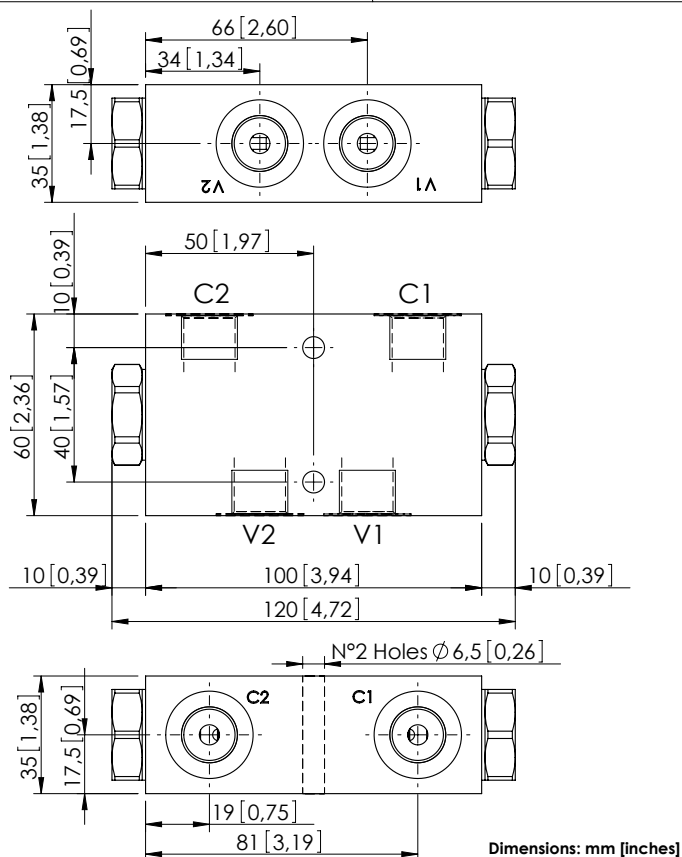



## PILOT OPERATED CHECK VALVE

**MCDN-030-TLNS**

DOUBLE ACTING

**SPECIFICATIONS**

|                                  |                     |
|----------------------------------|---------------------|
| Max. operating pressure:         | 350 bar (5000 psi)  |
| Rated flow:                      | 30 l/min (8 gpm)    |
| Manifold:                        | Aluminium           |
| Weight:                          | 0,67 kg (1,48 lbs)  |
| Contamination class to ISO 4406: | See technical spec. |
| MTTFa:                           | 150 years           |

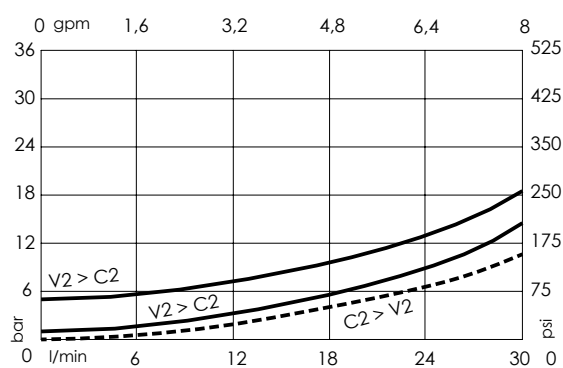**NOTES****CURVES****ORDERING CODES**

| Quick code | Description               | Main ports size      | Pilot ratio | Cracking pressure | O-ring on pilot piston |
|------------|---------------------------|----------------------|-------------|-------------------|------------------------|
| MC000002   | MCDN-030-TLNS-07-G38-N001 | V1,V2,C1,C2 : G 3/8" | 7:1         | 1 bar (15 psi)    | NO                     |
| MC000009   | MCDN-030-TLNS-07-G38-N005 | V1,V2,C1,C2 : G 3/8" | 7:1         | 5 bar (75 psi)    | NO                     |
| MC000010   | MCDN-030-TLNC-07-G38-N005 | V1,V2,C1,C2 : G 3/8" | 7:1         | 5 bar (75 psi)    | YES                    |
|            |                           |                      |             |                   |                        |
|            |                           |                      |             |                   |                        |
|            |                           |                      |             |                   |                        |