



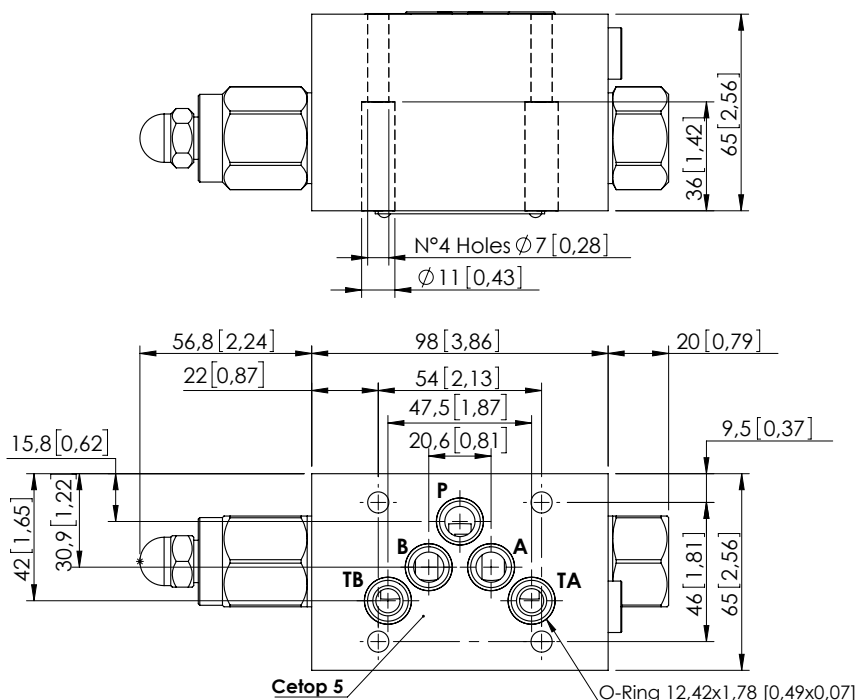

Dimensions: mm [inches]

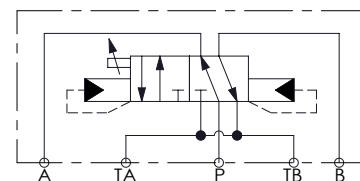

SPECIFICATIONS


Max. operating pressure:	350 bar (5000 psi)
Rated flow:	80 l/min (21 gpm)
Weight:	3,12 kg (6,8 lbs)
Manifold:	Cast Iron
Contamination class to ISO 4406:	See technical spec.
MTTFd:	150 years

NOTES

Minimum required flow: 6 l/min (1,6 gpm)

Flexible pipe should be placed between valve and cylinder rod side.
No suitable motor.

CURVES

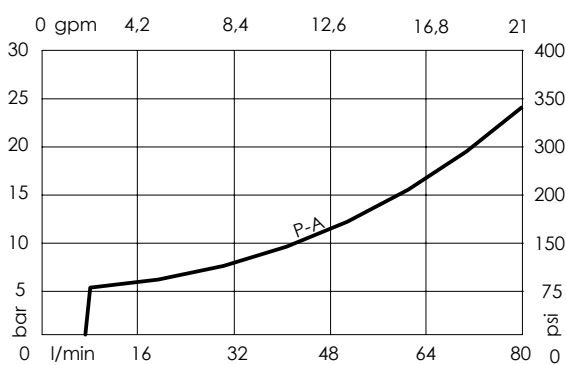

ORDERING CODES

Quick code	Description	Ports		
MD000034	MDAF-080-ANNR-NP-N10-N350	A,P,B,TA,TB: CETOP 5		